




EEMAC / NEMA 1 Hinged Door Boxes

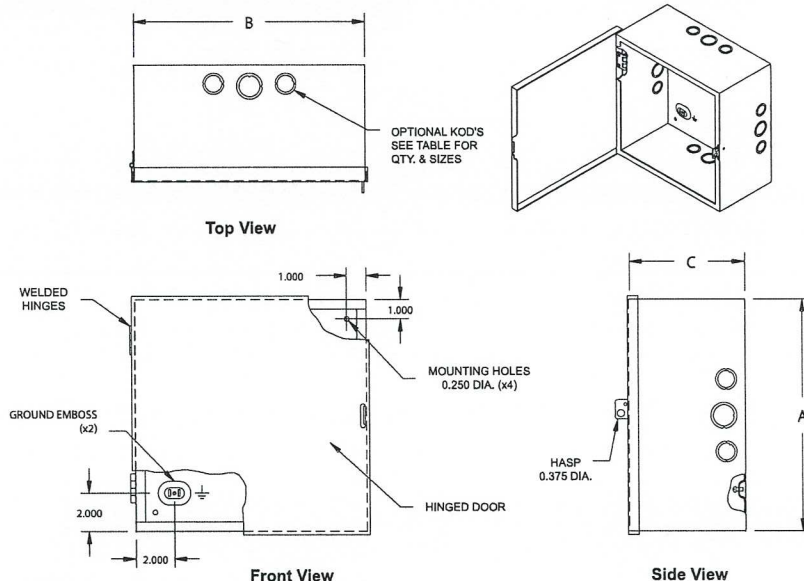

TECHNICAL READOUT

TECHNICAL READOUT						
Catalog No.	Dimensions (box)			Knockouts		Weight lbs.
	A	B	C	Sides	Top & bottom	
SINGLE DOOR						
CKO12126 C12126	12	12	6	2a/1b No Ko's	2a/1b	11.5
CKO18126 C18126	18	12	6	2a/3b No Ko's	2a/1b	15
CKO24126 C24126	24	12	6	2a/3b No Ko's	2a/3b	19
CKO16166 C16166	16	16	6	2a/3b No Ko's	2a/3b	17
CKO18186 C18186	18	18	6	2a/3b No Ko's	2a/3b	22
CKO20206 C20206	20	20	6	2a/3b No Ko's	2a/3b	32
CKO24246 C24246	24	24	6	2a/3b No Ko's	2a/3b	41
C202010	20	20	10	No Ko's		40
DOUBLE DOOR						
C303012	30	30	12			62
C363612	36	36	12	No Ko's		81
C484812	48	48	12			132

Knockouts (Conduit Size): a = 1/2" - 3/4" • b = 3/4" - 1"

Application:

Type 1 surface mounted enclosure generally used as a junction or pull box, switch box or general service box.

Construction:

- 16 or 14 gauge steel
- With easily removable knockouts (CKO) or without (C)
- Mounting holes on back
- Steel butt hinges
- Retractable sealing hasp
- Grounding emboss on 12126; grounding hole on larger sizes grounding screw provided with each size
- ANSI/ASA61 grey polyester textured powder coating inside out

Also Available:

- Aluminium, SS, galvanized steel
- Cutouts, louvers, additional knockouts
- Tamper proof screw
- Special finishes & sizes

Standards:

- CSA certified 150359
- UL listed E109311



BEL Products Inc.

Technical specifications subject to change without notice. 10/2013