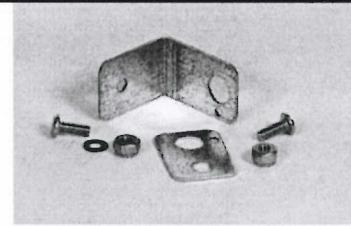


**Accessories****Mounting Hardware****Cat. No. AMFRS / AMFRSS****External Mounting Feet**

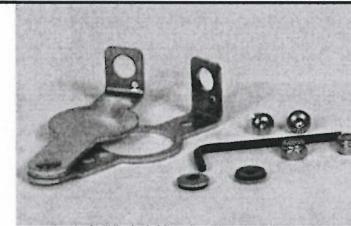
- Made from galvanized steel, for AMFRS
- Made from stainless #304 for AMFRSS
- To be mounted externally; suitable for water- / oil-tight enclosures
- Standard with every "R" enclosure
- Supplied with all necessary hardware for field installation

**Cat. No. APRS / APRSS****Provision for Padlocks**

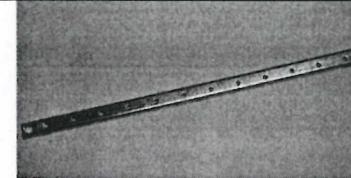
- Made from galvanized steel for APRS
- Made from stainless steel #304 for APRSS
- Provides a provision for padlocks
- Standard with every "R" and "AMC" enclosure
- To be mounted externally; suitable for water- / oil-tight enclosures
- Supplied with all necessary hardware for field installation

**Cat. No. AGPSRK**

- Padlock adapter fits directly over the slotted quarter turn preventing access.
- 2mm thick 14 gauge stainless steel.
- Stainless steel mounting hardware provided.
- Once installed, the bolts cannot be removed without the door open.
- Easy installed in the field.
- Maintains UL/CSA Type 4 rating

**Cat. No. AMR**

- Galvanized mounting rails unpainted, for R, HD and FRS series
- Perforated and slotted, for easy wiring installation.
- AMR-R, AMR-HD or AMR-FRS enclosures, add H for horizontal or V for vertical mounting rail. (AMR-RH or AMR -RV)
- Call factory for sizes and prices.

**Cat. No. AGK4****EEMAC/NEMA 4 Gasket Kit**

- 0.25" x 0.75" x 25" cellular gasket
- Self adhesive
- Used in **BEL** EEMAC/NEMA 4-12-3R enclosures

**Cat. No. ALEK****Lifting Eyes Kits (Pair)**

- 1/2 - 13 lifting eyes used on **BEL** large enclosures
- Sold by pair complete with flat seal washers and nuts
- Lifting capacity approximately 2500 lb each
- Can be factory installed (specify "F" instead of "K"; Ex. ALEF)

**Cat. No. APG / APW****Spray Paint**

- Gray paint "APG" (spray can)
- White paint "APW" (spray can)

**Cat. No. ASIL****Silicone**

- Silicone provided for EEMAC requirement
- Standard with ADSR-ADSHD

