





# PB Series

## EEMAC / NEMA 12 Pushbutton Enclosures

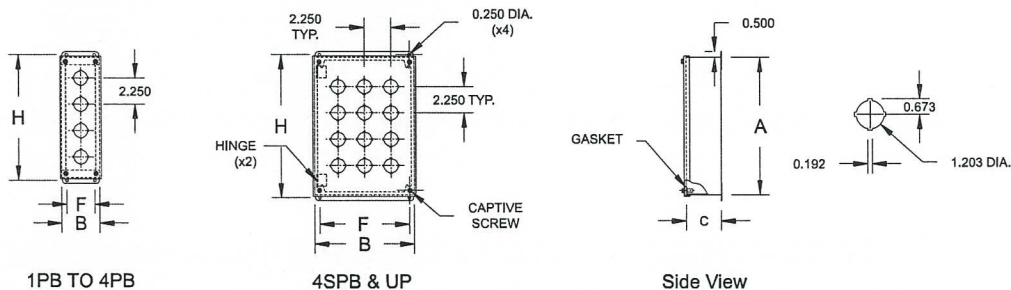

### TECHNICAL READOUT

Catalog No. with holes	Catalog No. without holes	Dimensions					Weight lbs.
		A	B	C	H	F	
1PB	1PBC	3.50	3.25	2.75	4.00	2.375	1.75
2PB	2PBC	5.75	3.25	2.75	6.25	2.375	2.25
3PB	3PBC	8.00	3.25	2.75	8.50	2.375	3.00
4PB	4PBC	10.25	3.25	2.75	10.75	2.375	3.50
4SPB	4SPBC	7.25	6.25	3.00	7.75	5.375	4.50
6PB	6PBC	9.50	6.25	3.00	10.00	5.375	5.25
9PB	9PBC	9.50	8.50	3.00	10.00	7.625	6.50
12PB	12PBC	11.75	8.50	3.00	12.25	7.625	7.50
16PB	16PBC	11.75	10.75	3.00	12.25	9.875	9.00
20PB	20PBC	14.00	10.75	3.00	14.50	9.875	10.50
25PB	25PBC	14.00	13.00	3.00	14.50	12.125	12.00
30PB	30PBC	16.25	13.00	3.00	16.75	12.125	14.00
36PB	36PBC	16.25	15.25	3.00	16.75	14.375	16.00
42PB	42PBC	18.50	15.25	3.00	19.00	14.375	18.00

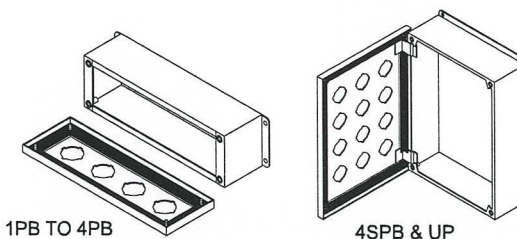

### Application:

Type 12 enclosure designed to accept pushbuttons, switches and pilot lights.

### Construction:


- 16 gauge steel
- Continuously welded and ground smooth seams
- Cover secured by captive nickel plated screws threaded into sealed wells
- ANSI/ASA61 grey polyester textured powder coating inside out

### Also Available:

- Blank cover (add "C" as in 1PBC)
- 4 3/4 extra deep box (add "X" as in 1PBX)
- Hinged cover and/or sloping front
- Aluminium, SS, galvanized steel & special finishes

### Standards:

- CSA certified 150359
- UL listed E109310

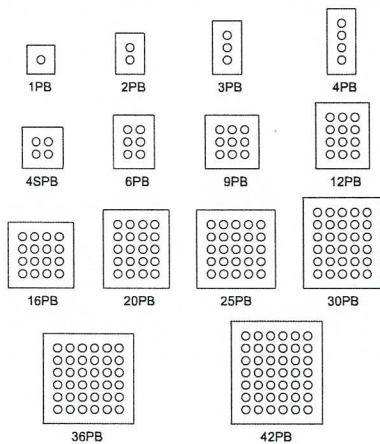

PB CONFIGURATION SAMPLES

